


MSSL60W | 60W Solar Street Light



Built-in dimmable LED Driver. Controller is set to run 6 hours at 100% power and remainder of the night 70% power. Light: 90 X Phillips 3030 – Cool White 5K5 - 7800lm Battery Capacity and type: 14.4V Lithium Battery Controller: SmartLED 8A with day/night sensor Solar Panel: 120W X 2; Battery Capacity 1015Wh Charge Time with full sunshine: 3.5 Hours Light Coverage: Approximately 35m X 10m rectangle Bracketing: Includes battery box bracket, solar panel bracket and light bracket Pole Frequency - 30m

Luminaire

| | |
|-----------------|-------------------|
| Luminaire Power | 60,00 W |
| Lumen | 9 900 |
| LED Type | SMD |
| LED Name | Philips Lumileds |
| Lens | PMMA |
| LED Temperature | 5000K |
| Beam Angle | 150deg/80deg |
| Coverage | 350m ² |
| CRI | >80 |

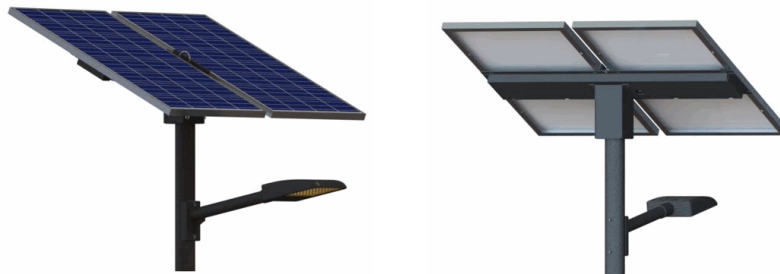

With the battery neatly concealed within the solar panel bracket, installation is quick and easy. The only real considerations are aiming the light and panel in the desired directions.

Battery

| | |
|------------|-------------|
| Chemistry | Lithium-Ion |
| Amp Hours | 40Ah |
| Watt Hours | 1 015 |
| Cycles | >2000 |

Solar Panel

| | |
|---------------|--------|
| Panel Total W | 240 |
| Panel Voltage | 36V |
| Panel Current | 6.67 A |

Controller

| | |
|------------------------|--|
| Controller Type | MPPT SmartLED |
| Controller Size | 15A |
| Controller Program | 6hrs 100%, 7hrs 70% |
| Controller Protections | Over-Charge, Over-Discharge, Temp Compensation |
| Controller Sensor | Built-in Day/Night Sensor |
| Operating Temp | -10 to 45 deg C |
| IP Rating | IP68 |

Installation

| | |
|-------------------|-------------------------|
| Mounting Height | 8m |
| Pole-to-Pole | 30-35m |
| Pole Top Size | 101 |
| Power Box Type | MB-67-D |
| Steel Description | High Quality Galvanized |
| Warranty | 3 Years |
| Pole or Base | Not Included |



In order to protect against corrosion, all metal used in our products is either galvanized steel or aluminium. The steel is powder-coated with a 'structure'UV resistant epoxy. Our warranty on all parts is 3 years.

We use lithium ion batteries as they have many benefits over lead acid battery types. The storage/weight ratio of lithium batteries allows us to make larger lighting systems for single poles. Lithium batteries also charge faster, use more of the battery and have a much longer cycle life. The extra cost of a lithium ion battery is easily countered by the saving on the steel and aluminium structures we use to hold and carry our systems. All of our batteries have intelligent Battery Management Systems to ensure high accuracy and safety of charging and discharging.



The options for installing poles for lighting are:

Base Plate Pole: This pole requires a bolt cage to be submerged into the ground and set in concrete. The Pole is then bolted onto the bolt cage.

Stepped Pole: Our stepped poles are inserted directly into the ground and concreted in place. The poles will need to be supported vertically until concrete has set. This installation method is less expensive than a base plate pole.

Standard Pole: For some smaller installations, you may use a standard pole. Which is a simple length with no steps or base plate. This pole will also be inserted directly into the ground and concreted in place.

Wall Pole: For lighting around buildings, the wall pole is bolted onto the wall, and the light and solar system installed on the pole.

Installation Options

